



UV

: WP-UVx-G1/2-1y

-
-
- 0-5V 4-20mA
-



		(mm)	(g)	
		11	95	316L
	T_{opt}	-30-85	°C	
	T_{sto}	-40-90	°C	
	p	10	bar	
(25 °C)				
	V_{cc}	9-24	V	
	I_{out}	4-20	mA	2 (WP-UVx-G1/2-11)
				3 (WP-UVx-G1/2-12)
	V_{out}	0-5	V	3 (WP-UVx-G1/2-13)
1		220-280	nm	WP-UVC-G1/2-1y
		220-325		WP-UVB-G1/2-1y
		220-370		WP-UVA-G1/2-1y
		290-440		WP-UVV-G1/2-1y
	P	0-200	mW/cm ²	²
	5pin			
	2			

¹ UVA, UVB, UVC, UVV UV


² : 0-200 mW/cm² (standard), 0-1 W/cm² (option), 0-10 W/cm² (option), 0-40 W/cm² (option).




UV

: WP-UVx-G1/2-1y

Cable

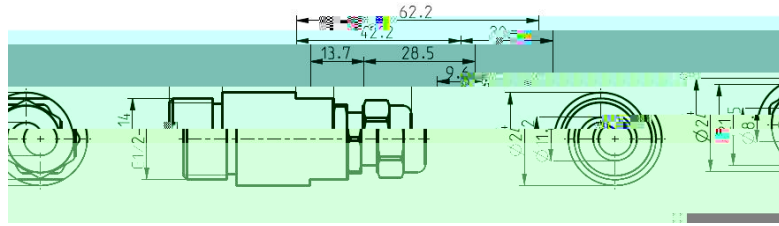

Circular connector

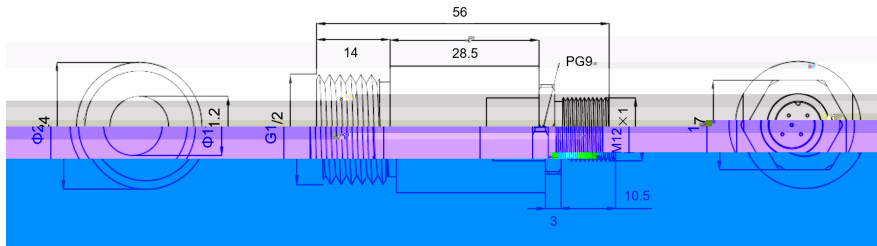

5 : 1=V_{CC}, 2=